



EMERGENCY LIGHTING

DIAMOND IVI^{TMI}



The DIAMOND M family is a modern directional luminaire characterised by a minimalist and elegant design that fits perfectly into a variety of architectural spaces. Mounting options available - surface, recessed (using a dedicated accessory) or suspended - are ideal for any setting.

The luminaires are available in both single-sided and double-sided versions, increasing their versatility of use. Thanks to the use of innovative pictogram backlighting, a luminance of 500 cd/m² is achieved with a light source power of just 1W, providing excellent visibility with low energy consumption.

DIAMOND M family luminaires are ideal for offices, circulation corridors and public spaces.





DIAMOND M AC



DIAMOND M AC



DIAMOND M B



DIAMOND M AL



DIAMOND M AL

New high-end exit signs

MINIMALIST
AND ELEGANT
DESIGN

always painted
pictogram

stylish
frameless
plexiglass



EXCELLENT VISIBILITY AND ENERGY EFFICIENCY

innovative backlighting technology with a luminance of 500cd/m²

only 1W power consumption



**QUICK AND EASY
ASSEMBLY**

a clever way of installation

„click-click” technology





White, grey or black polycarbonate body • Plexi glass



Surface



Self contained – 220 - 240VAC - 50/60Hz
Central battery – 220 - 240VAC - 50/60Hz; 176 - 275VDC
Central battery FZLV II – 48VDC



1W LED



Premium: max. 12h; energy-saving electronic charger



Premium: 1h or 3h, LiFePO₄ 3,2V batteries



II or III



IP40, IK06




Single sided



SE • SA • AT • RU • RW2 • FZLV2 • CB



LED indicator signalizes mains power supply and battery charge • Deep discharge protection • III class of insulation of FZLV2 version • RW2 option available

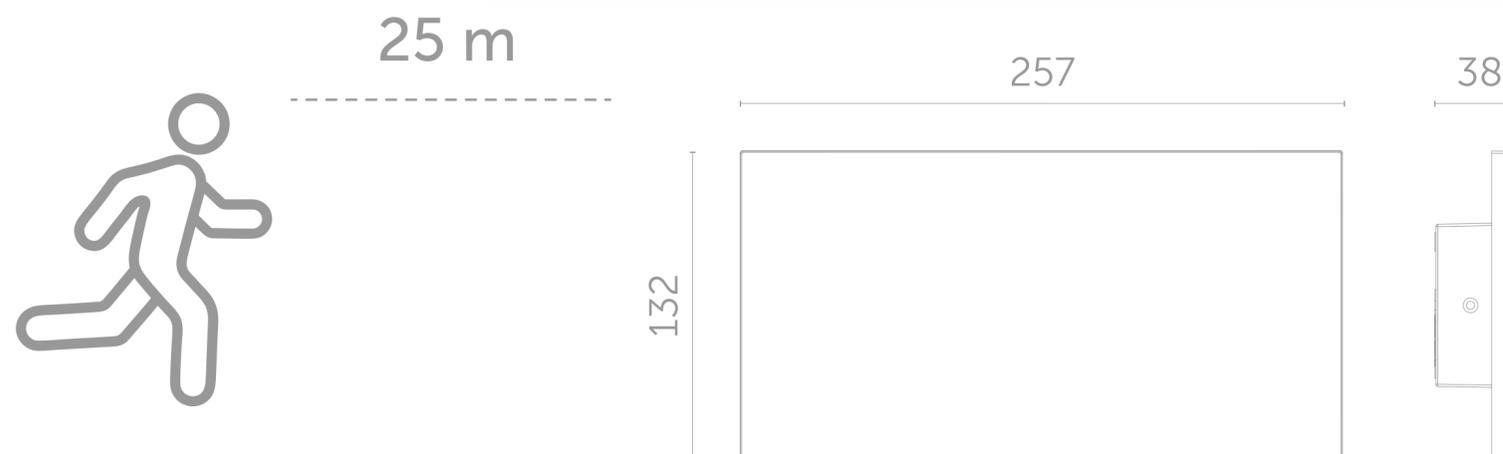



White, grey or black polycarbonate body • Plexi glass



Surface



Self contained – 220 - 240VAC - 50/60Hz
Central battery – 220 - 240VAC - 50/60Hz; 176 - 275VDC
Central battery FZLV II – 48VDC



1W LED



Premium: max. 12h; energy-saving electronic charger



Premium: 1h or 3h, LiFePO₄ 3,2V batteries



II or III



IP40, IK06



Double-sided



SE • SA • AT • RU • RW2 • FZLV2 • CB



LED indicator signalizes mains power supply and battery charge • Deep discharge protection • III class of insulation of FZLV2 version • RW2 option available



25 m





White, grey or black polycarbonate body • Plexi glass



Recessed



Self contained – 220 - 240VAC - 50/60Hz
Central battery – 220 - 240VAC - 50/60Hz; 176 - 275VDC
Central battery FZLV II – 48VDC



1W LED



Premium: max. 12h; energy-saving electronic charger



Premium: 1h or 3h, LiFePO₄ 3,2V batteries



II or III



IP40, IK06



Double-sided




SE • SA • AT • RU • RW2 • FZLV2 • CB



LED indicator signalizes mains power supply and battery charge • Deep discharge protection • III class of insulation of FZLV2 version • RW2 option available



25 m

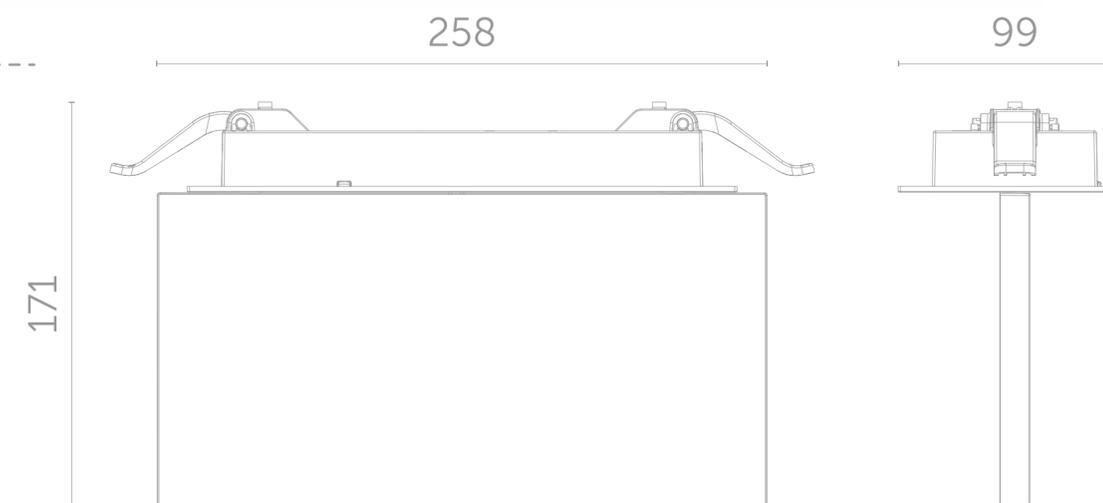



White, grey or black polycarbonate body • Plexi glass



Surface



Self contained – 220 - 240VAC - 50/60Hz
Central battery – 220 - 240VAC - 50/60Hz; 176 - 275VDC
Central battery FZLV II – 48VDC



1W LED



Premium: max. 12h; energy-saving electronic charger



Premium: 1h or 3h, LiFePO₄ 3,2V batteries



II or III



IP40, IK06



Double-sided




SE • SA • AT • RU • RW2 • FZLV2 • CB



LED indicator signalizes mains power supply and battery charge • Deep discharge protection • III class of insulation of FZLV2 version • RW2 option available



25 m

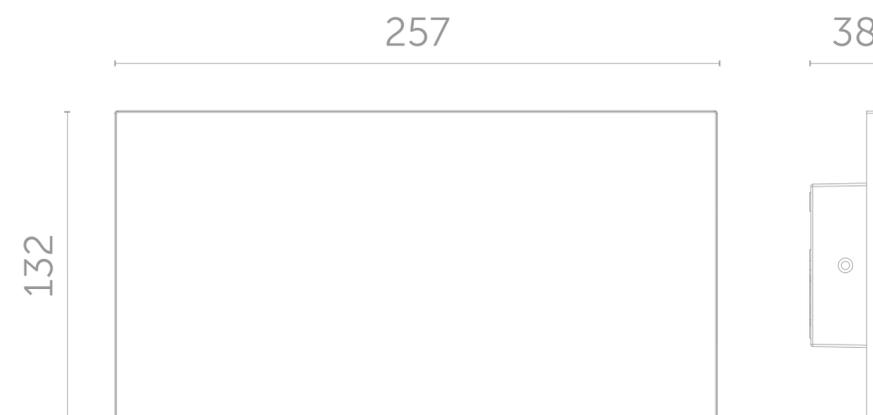

DIAMOND M ALR

Emergency
lighting

awex.eu



White, grey or black polycarbonate body • Plexi glass



Recessed



Self contained – 220 - 240VAC - 50/60Hz
Central battery – 220 - 240VAC - 50/60Hz; 176 - 275VDC
Central battery FZLV II – 48VDC



1W LED



Premium: max. 12h; energy-saving electronic charger



Premium: 1h or 3h, LiFePO₄ 3,2V batteries



II or III



IP40, IK06



Double-sided




SE • SA • AT • RU • RW2 • FZLV2 • CB



LED indicator signalizes mains power supply and battery charge • Deep discharge protection • III class of insulation of FZLV2 version • RW2 option available



25 m

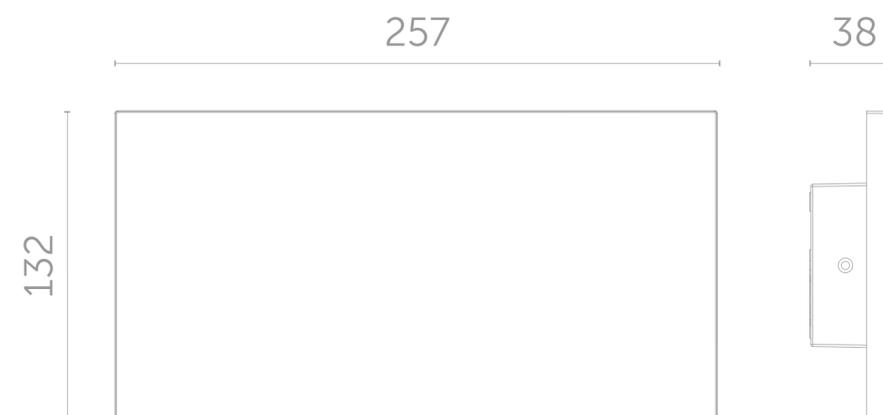

Accessories

ACCESSORY FOR RECESSED MOUNTING

DM/REC/WH
DM/REC/GR
DM/REC/BL



CONCRETE MOUNTING BOX

DMB/RWC





awex.eu

RAFAŁ STANUCH PPHU AWEX SP. Z O.O.

Masłomiąca, Długa 39
32-091 Michałowice, Poland
T: [+48] 12 681 55 00
M: export@awex.eu